


REV.	REVISION RECORD	BY	DATE
0	ORIGIN	HW	6.7.2024

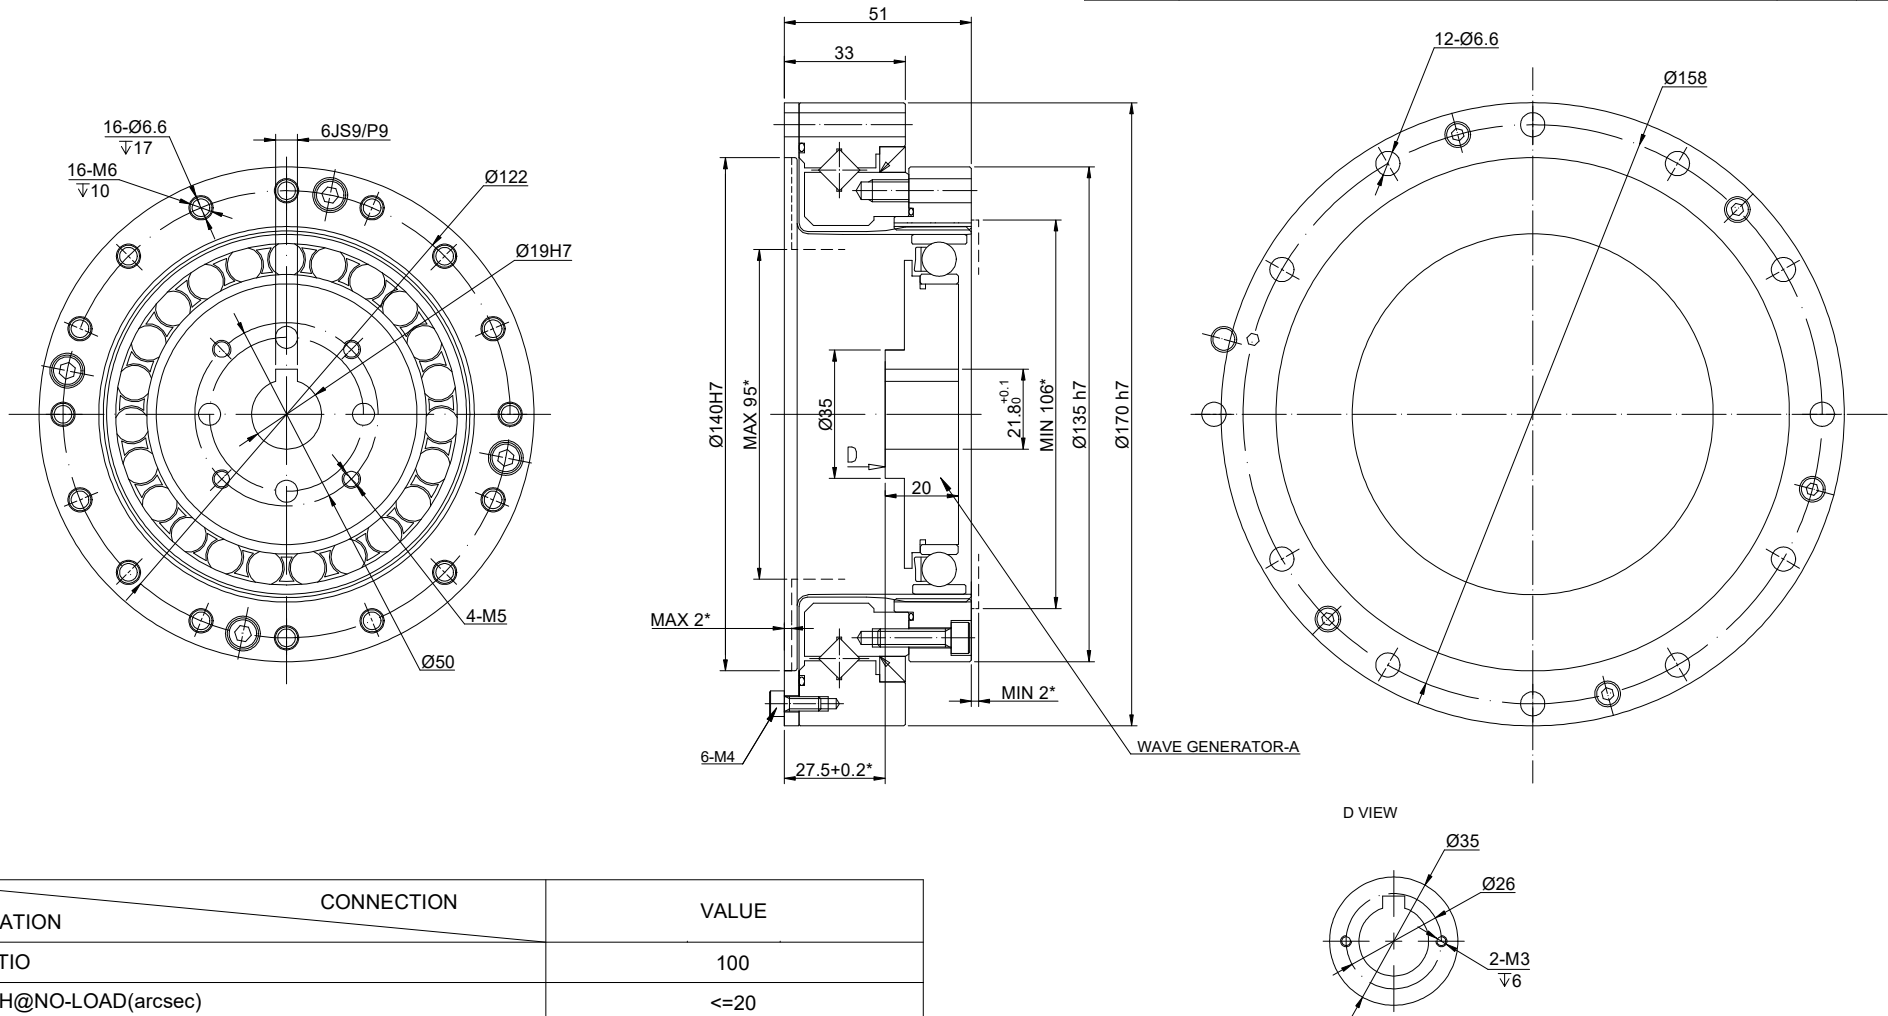

SPECIFICATION	CONNECTION	VALUE
GEAR RATIO		100
BACKLASH@NO-LOAD(arcsec)		<=20
RATED TORQUE(INPUT SPEED 2000RPM)(Nm)[lb-in]		265.00[2345.45]
MOMENT PERMISSIBLE TORQUE(Nm)[lb-in]		1080.00[9558.81]
PEAK START-STOP TORQUE(Nm)[lb-in]		568.00[5027.23]
MAXIMUM INPUT SPEED ALLOWED(RPM)		4000
AVERAGE INPUT SPEED ALLOWED(RPM)		3000
WEIGHT(kg)		4.40
LIFE(h)		15000
AMBIENT TEMPERATURE		0°C~40°C[32°F~104°F]

DIMENSIONS ARE IN MILLIMETERS.  
TOLERANCES AS BELOW:  
DECIMALS ANGLES  
X ±0.5 ±2°  
X.X ±0.25  
X.XX ±0.13

THIRD ANGLE  
PROJECTION



SIGNATURE

DATE

DRN

HW

6.7.2024

APVD

LDJ

6.12.2024

STEPPERONLINE®

HARMONIC REDUCER

HHT-40-100-I-D19

REV. 0 SCALE 2:3 DWG NO. A3360