


REV.	REVISION RECORD	BY	DATE
0	ORIGIN	HW	6.3.2024

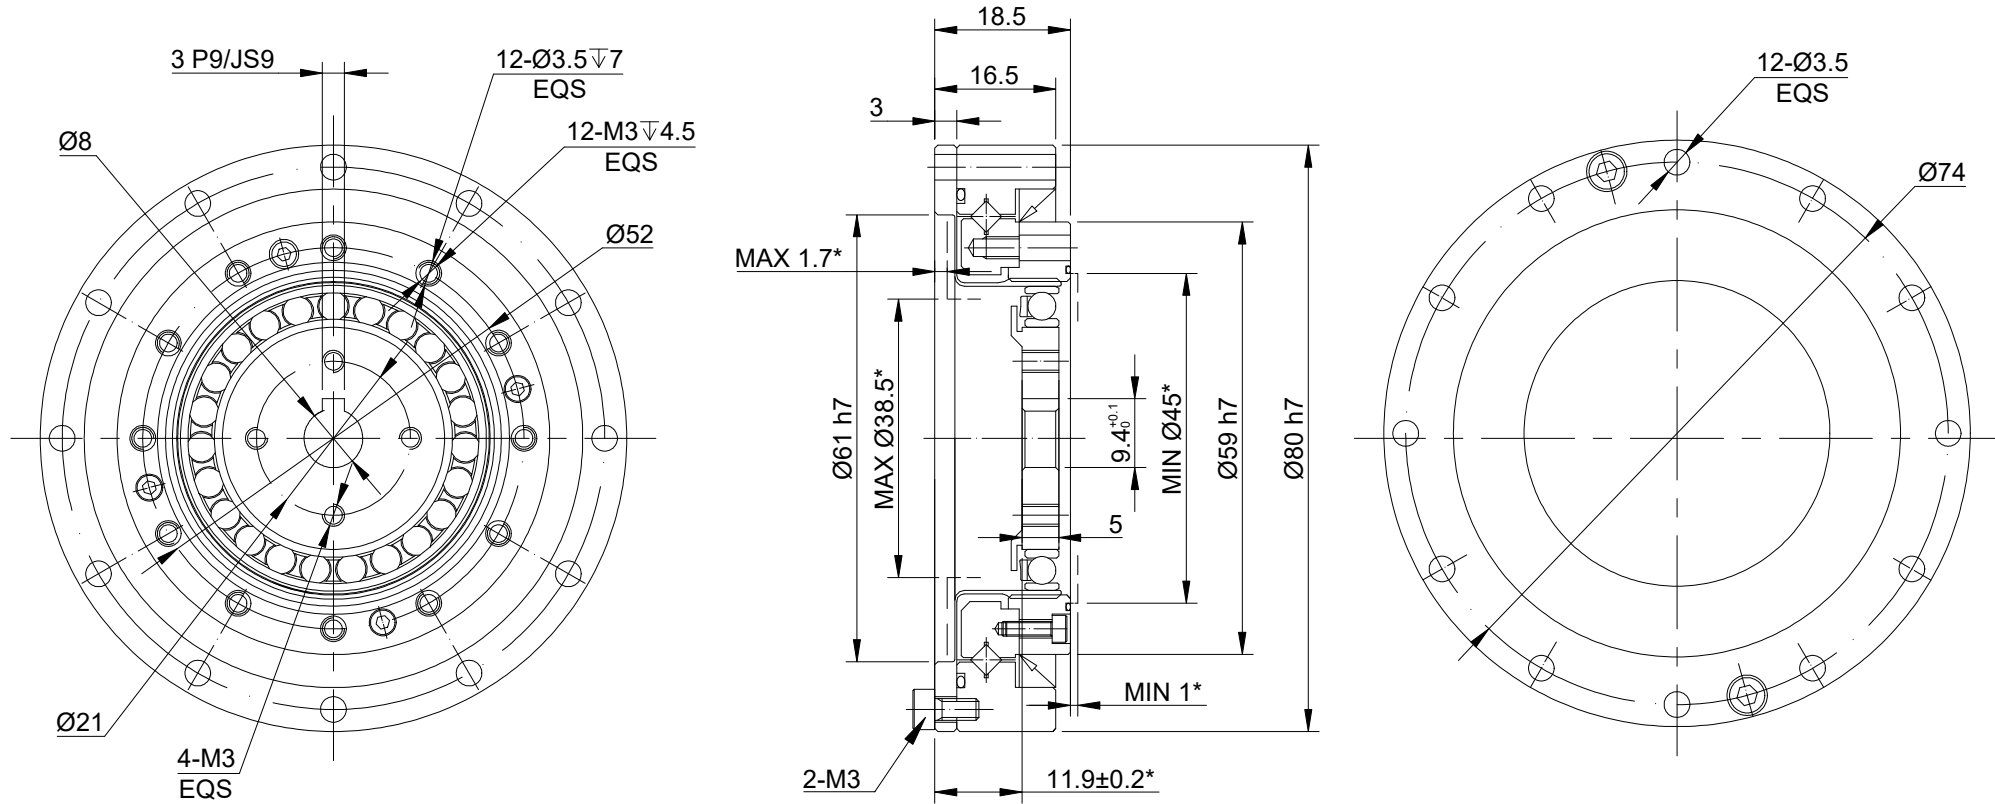

SPECIFICATION	CONNECTION	VALUE
GEAR RATIO		50
BACKLASH@NO-LOAD(arcsec)		<=20
RATED TORQUE(INPUT SPEED 2000RPM)(Nm)[lb-in]		11.00[97.36]
MOMENT PERMISSIBLE TORQUE(Nm)[lb-in]		48.00[424.84]
PEAK START-STOP TORQUE(Nm)[lb-in]		23.00[203.57]
MAXIMUM INPUT SPEED ALLOWED(RPM)		7300
AVERAGE INPUT SPEED ALLOWED(RPM)		3500
WEIGHT(kg)		0.42
LIFE(h)		9000
AMBIENT TEMPERATURE		0°C~40°C[32°F~104°F]

DIMENSIONS ARE IN MILLIMETERS.
TOLERANCES AS BELOW:
DECIMALS ANGLES
X ±0.5 ±2°
X.X ±0.25
X.XX ±0.13

THIRD ANGLE
PROJECTION



SIGNATURE

DATE

DRN

HW

6.3.2024

APVD

LDJ

6.12.2024

STEPPERONLINE®

HARMONIC REDUCER

HHD-17-50-I-D8