


REV.	REVISION RECORD	BY	DATE
0	ORIGIN	HW	6.4.2024

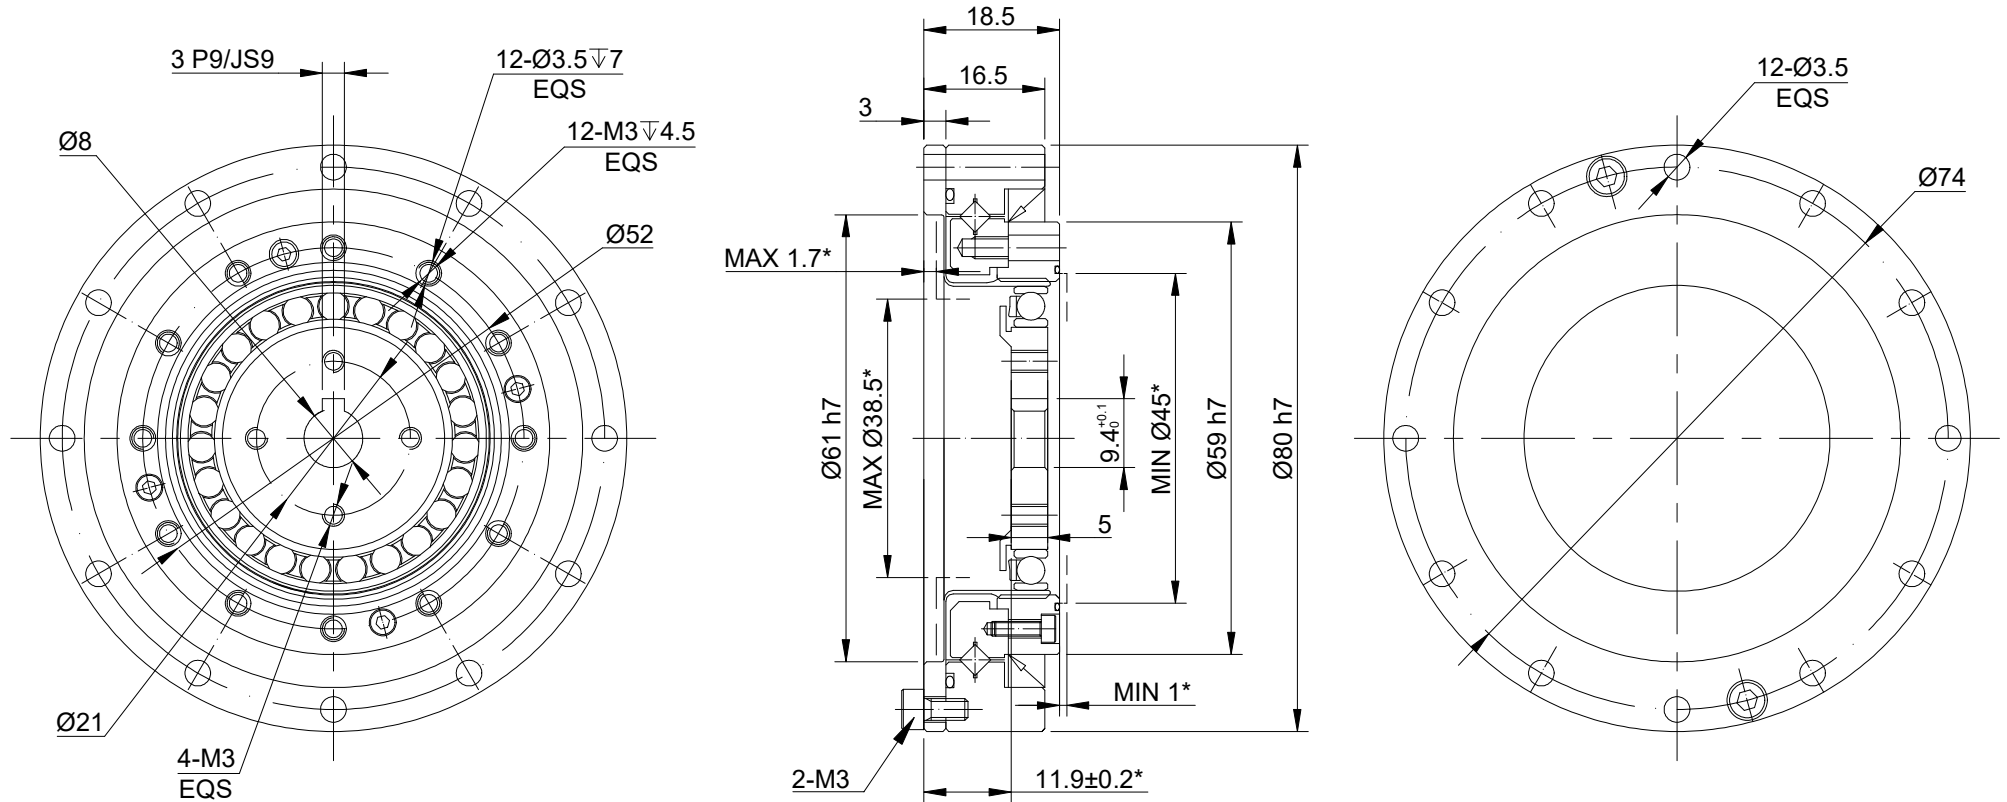

SPECIFICATION	CONNECTION	VALUE
GEAR RATIO		100
BACKLASH@NO-LOAD(arcsec)		<=20
RATED TORQUE(INPUT SPEED 2000RPM)(Nm)[lb-in]		16.00[141.61]
MOMENT PERMISSIBLE TORQUE(Nm)[lb-in]		71.00[628.4]
PEAK START-STOP TORQUE(Nm)[lb-in]		37.00[327.48]
MAXIMUM INPUT SPEED ALLOWED(RPM)		7300
AVERAGE INPUT SPEED ALLOWED(RPM)		3500
WEIGHT(kg)		0.42
LIFE(h)		10000
AMBIENT TEMPERATURE		0°C~40°C[32°F~104°F]

DIMENSIONS ARE IN MILLIMETERS.
TOLERANCES AS BELOW:
DECIMALS ANGLES
X $\pm$ 0.5 $\pm$ 2°
X.X $\pm$ 0.25
X.XX $\pm$ 0.13

THIRD ANGLE
PROJECTION



SIGNATURE

DATE

DRN

HW

6.4.2024

APVD

LDJ

6.12.2024

STEPPERONLINE®

HARMONIC REDUCER

HHD-17-100-I-D8

REV.	0	SCALE	1:1	DWG NO.	A3325
------	---	-------	-----	---------	-------